

FEATURES

- Compact and low weight valve enabling easy installation
- AC/DC interchangeability of the solenoid head without any need for disassembly of the valve
- The solenoid valves satisfy all relevant EC directives

GENERAL

Differential pressure	See «SPECIFICATIONS» [1 bar = 100 kPa]
Maximum viscosity	40 cSt (mm²/s)
Response time	8 - 20 ms

fluids (*)	temperature range (TS)	seal materials (*)
air, inert gas, water, oil	-25°C to +80°C	NBR (nitrile)

MATERIALS IN CONTACT WITH FLUID

(*) Ensure that the compatibility of the fluids in contact with the materials is verified


	Brass body	Stainless steel body
Body	Brass	AISI 316L (1.4404)
Internal parts	Stainless steel	Stainless steel
Springs	Stainless steel	Stainless steel
Seat	Brass and stainless steel	Stainless steel
Seals	NBR	NBR
Shading coil	Copper	Copper

ELECTRICAL CHARACTERISTICS

Coil insulation class	F
Connector	Spade plug (cable Ø 6-10 mm)
Connector specification	ISO 4400 / EN 175301-803, form A
Electrical safety	IEC 335
Electrical enclosure protection	Moulded IP65 (EN 60529)
Standard voltages	DC (=): 24V - 48V
(Other voltages and 60 Hz on request)	AC (~): 24V - 48V - 115V - 230V / 50 Hz

prefix option	power ratings				operator ambient temperature range (TS) (C°)	replacement coil		type ⁽¹⁾
	inrush ~	holding ~		hot/cold =		~	=	
	(VA)	(VA)	(W)	(W)		230 V/50 Hz	24 V DC	
	55	23	10,5	9 / 11,2	-25 to +60	400425-117	400425-142	01

⁽¹⁾ Refer to the dimensional drawings on the following page.

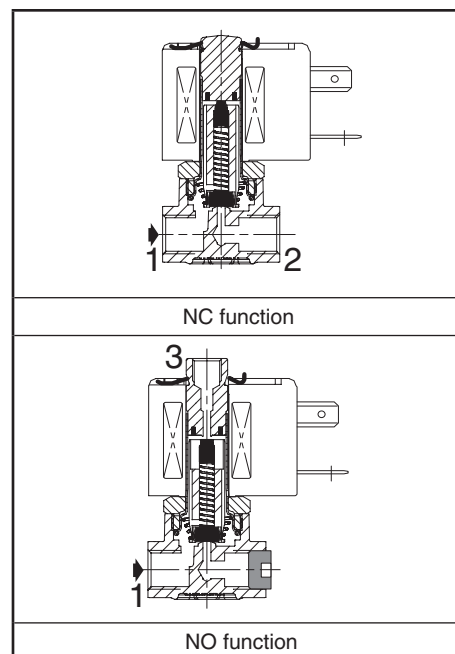

SPECIFICATIONS

pipe size	orifice size	flow coefficient Kv		operating pressure differential (bar)					power coil (W)		catalogue number				options		
				min.	max. (PS)						brass	stainless steel		maintained man. operator	FPM	EPDM	
					air (*)	water/oil (*)											
(G*)	(mm)	(m³/h)	(l/min)		~	=	~	=	~	=	~	=	~	=			
NC - Normally closed																	
1/4	2	0,11	1,8	0	40	40	40	40	10,5	11,2	SCE272A016		SCE272A046		MS	V	E
	2,7	0,22	3,6	0	40	15	40	15	10,5	11,2	SCE272A017		SCE272A047		MS	V	E
	3,8	0,32	5,3	0	20	8	20	8	10,5	11,2	SCE272A018		SCE272A048		MS	V	E
	4,5	0,42	7	0	16	5	16	5	10,5	11,2	SCE272A019		SCE272A049		MS	V	E
	5,5	0,63	10,5	0	10	2	10	2	10,5	11,2	SCE272A020		SCE272A050		MS	V	E
NO - Normally open																	
1/4 (2)	2,5	0,2	3,3	0	20	20	10	10	10,5	11,2	SCE272A022		SCE272A052		MS	V	E

⁽²⁾ Size of port 1: 1/4, size of Port 3: G 1/8.

OPTIONS

- Valves can also be supplied with FPM (fluoroelastomer) and EPDM (ethylene-propylene) seals and discs. Use the appropriate optional suffix letter for identification
- Waterproof enclosure with embedded screw terminal coil according to protection class IP67, CEE-10 (prefix WP or WS)
- Explosionproof enclosures for use in zones 1/21-2/22, categories 2-3 to ATEX Directive 94/9/EC (see "Explosionproof solenoids" section)
- Compliance with "UL", "CSA" and other local approvals available on request
- Oxygen service with seals and disc in FPM, suffix N, example: SCE272A016 NV
- Other pipe connections are available on request
- Plug with visual indication and peak voltage suppression or with cable length of 2 m (see Solenoids, Coils & Accessories section)

INSTALLATION

- The solenoid valves can be mounted in any position without affecting operation
- Brass solenoid valves have 2 mounting holes in body
- Pipe connections 1/4 (G*) have standard combination thread according to ISO 228/1 and ISO 7/1. Pipe connections G 1/8 have standard thread according to ISO 228/1
- Installation/maintenance instructions are included with each valve

SPARE PARTS KIT

catalogue number	spare parts kit no.		
	~	=	maintained man. operator
SCE272A016/017/018	C140040	C140040	C140048
SCE272A019/020	C140040	C140040	C140048
SCE272A046/047/048	C140040	C140040	C140072
SCE272A049/050	C140040	C140040	C140072
SCE272A022	C140038	C140038	C140048
SCE272A052	C140038	C140038	C140072

(1) Standard suffixes E and V are also applicable to kits.

- Not available

ORDERING EXAMPLES:

SC	E	272	A	016	MS	230V / 50 Hz
SC	E	272	A	046	V	115V / 50 Hz
SC	E	272	A	052		24V / DC
prefix						voltage
pipe thread						suffix
basic number						

ORDERING EXAMPLES KITS:

C140040 ⁽¹⁾		
C140038	V	
C140038	E	
basic number		suffix

DIMENSIONS (mm), WEIGHT (kg)




TYPE 01

Prefix "SC" Solenoid
Epoxy moulded
IEC 335 / ISO 4400
IP65


SCE272A016/017/018/019/020

SCE272A022

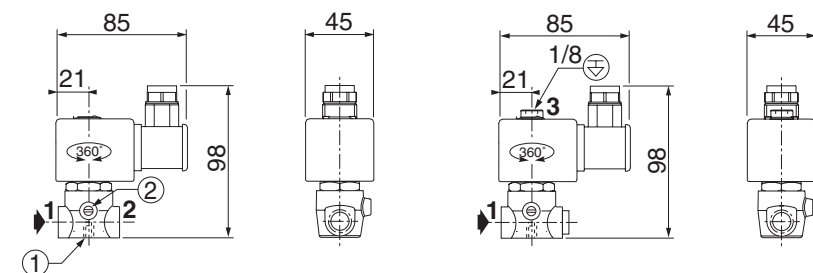

SCE272A046/047/048/049/050

SCE272A052

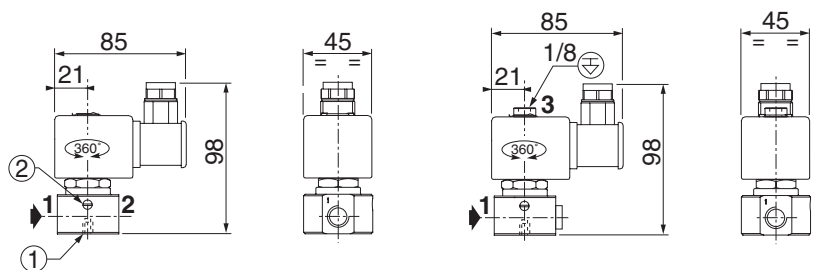

(1) 2 mounting holes Ø M4, depth 6 mm.

(2) Manual operator location.

type	prefix option	catalogue number	weight ⁽²⁾
01	SC	SCE272A016/017/018/019/020	0,51
		SCE272A046/047/048/049/050	0,56
		SCE272A022	0,54
		SCE272A052	0,60

(2) including coil and connector..