

FEATURES

- Cylinder equipped with low friction piston seal

GENERAL

Ambient temperature -25°C to +80°C (without position detectors)
-20°C to +70°C (with position detectors)

Max. speed rate 3 m/s


CONSTRUCTION

Piston	light alloy
Other parts	Same as standard cylinders



HOW TO ORDER

15-DIGIT PRODUCT CODE

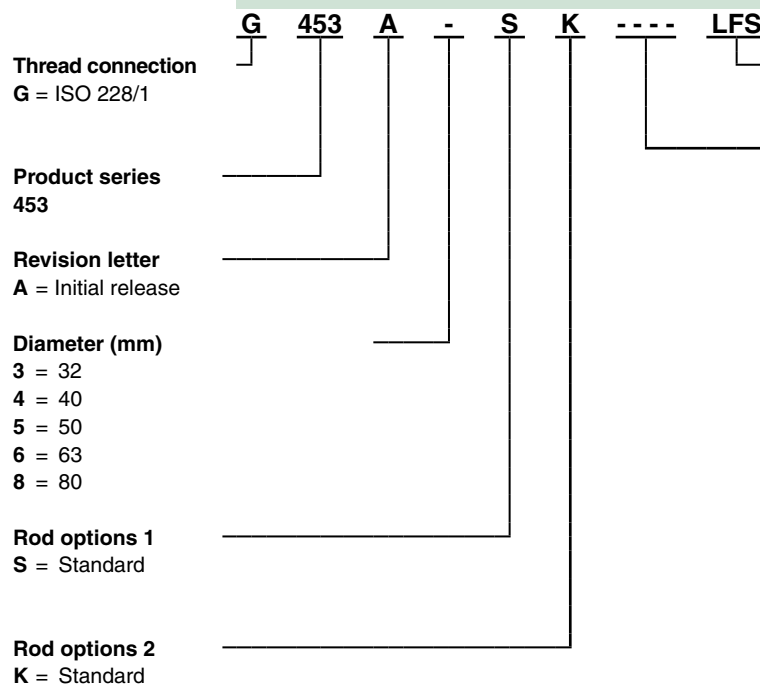

Options

LFS = Low friction piston seals - Ø 32 to 80 mm

Recommended standard strokes (mm) ⁽¹⁾

Ø mm	25	50	80	100	125	160	200	250	320	400	500	630	700	800	900	1000	max. stroke
32	●	●	●	●	●	●	●	●									1000
40	●	●	●	●	●	●	●	●	●	●							1500
50	●	●	●	●	●	●	●	●	●	●	●	●					1800
63	●	●	●	●	●	●	●	●	●	●	●	●	●	●			1800
80	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	2000

(1) Other strokes on request.

SPARE PARTS KITS CODE

Ø (mm)	1 + 2 + 3 + 4 ⁽¹⁾				rod + piston unit
	1	2	Magnet	3	
32	●	●	●	●	-
40	●	●	●	●	-
50	●	●	●	●	-
63	-	-	●	●	97802887 ⁽²⁾
80	-	-	●	●	97802888 ⁽²⁾

⁽¹⁾ For best results, use grease supplied in each kit. Supplementary tube (11 cm³) available on request, catalogue number: 97802100

⁽²⁾ Specify stroke length (in mm).